



ETS-T41

# ETS-T41

CPU COOLER



# ETS-T41

## CPU COOLER


- Supports up to 250W TDP
- HDT (Heat-pipe Direct Touch) Technology Equipped with 4 x Ø6 mm Heat Pipes
- Compact Design to Fit in Most Computer Chassis
- 2 x 120mm Fans

### Features


- The ETS-T41 CPU Air Cooler features 4 x Ø6 mm heat pipes and 2 x 120mm hydraulic bearing fans (1600 RPM and 1400 RPM) with a dual-fan forward and reverse blade design, improving airflow stability and delivering up to 250W TDP cooling performance.
- Compact 157mm height heatsink size can fit into many popular chassis.
- Heat-pipe Direct Touch (HDT) technology ensures rapid thermal conduction and eliminates CPU hot spots.
- The 120mm PWM fan's 9-blade design optimizes airflow and acoustic performance.




4 x Ø6 Heat Pipe Direct Touch Base Design

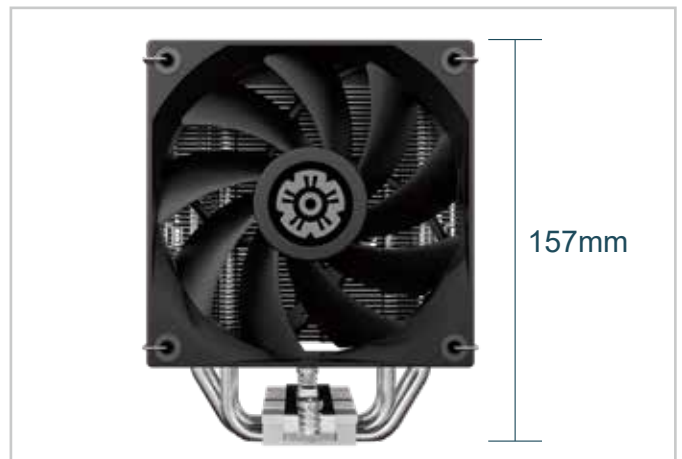

Compact Design with a Total Height of 157 mm

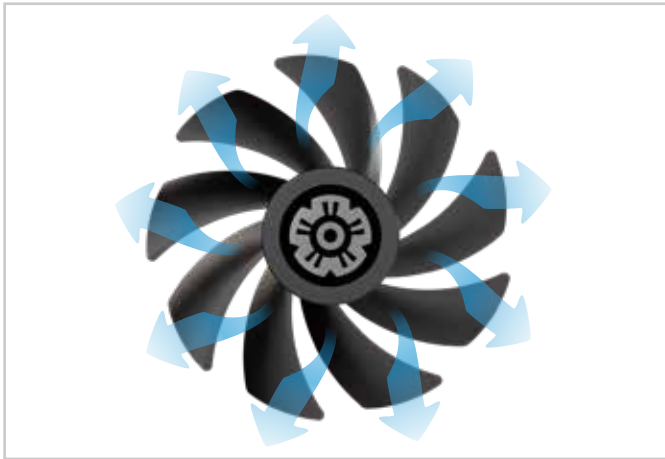


PWM-Controlled Fan with a 9-Blade Design

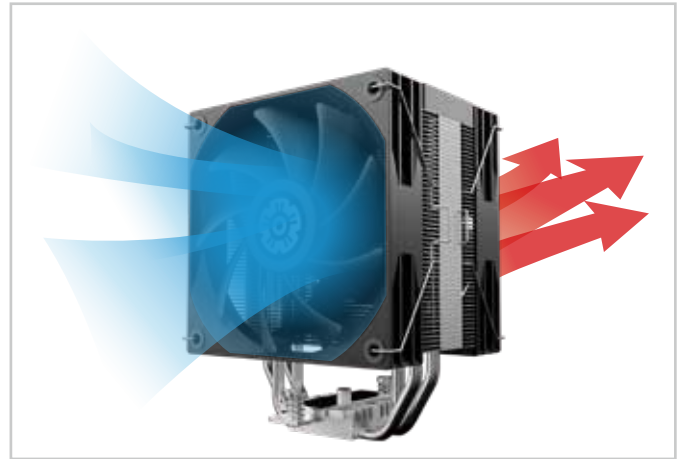

Superior Cooling Capacity (250W TDP)

## Dimension

unit : mm

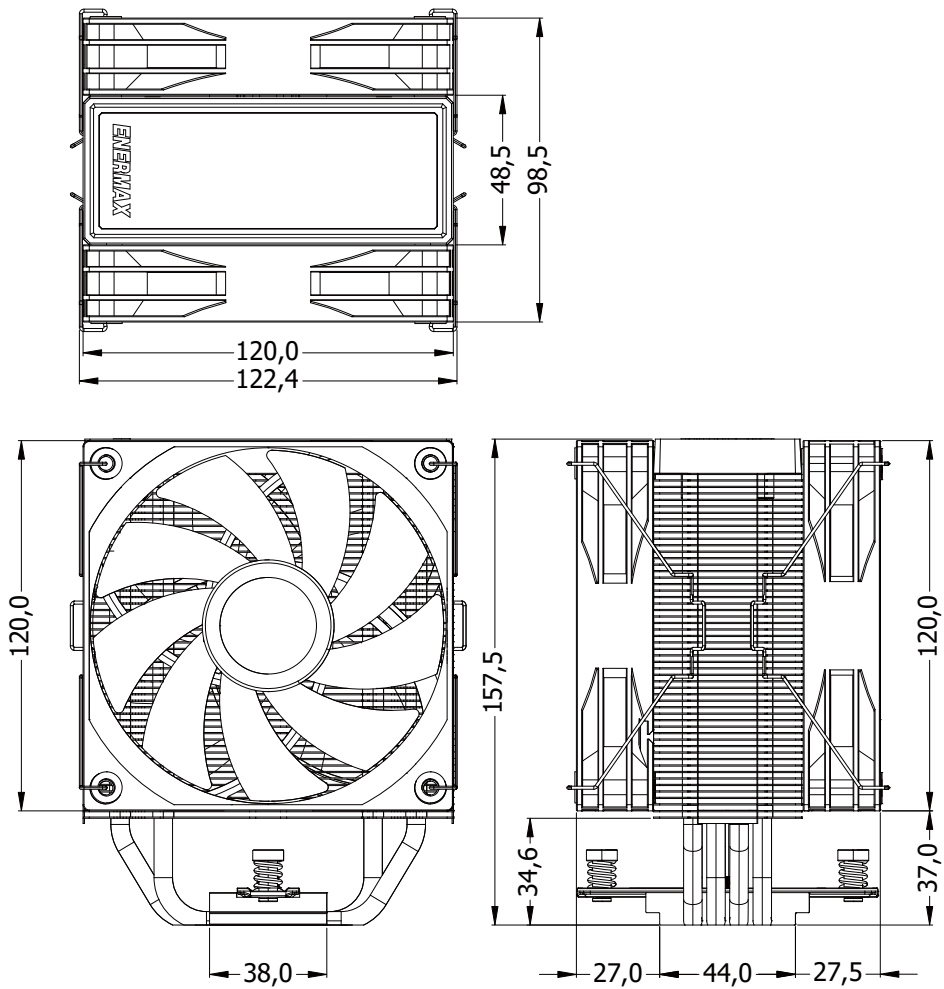

| Model             |                 | ETS-T41                                       |
|-------------------|-----------------|-----------------------------------------------|
| CPU Socket        |                 | Intel® LGA1851/1700/115x/1200<br>AMD® AM5/AM4 |
| Overall Dimension |                 | 120 X 100 x 157 mm                            |
| Weight            |                 | 705g (W/ fan)                                 |
| Heat Pipe         |                 | 4x Ø6 mm                                      |
| Material          | Heat Pipes      | Copper                                        |
|                   | Fins            | Aluminum                                      |
| Fan               | Dimension       | 120 x 120 x 25 mm                             |
|                   | Speed           | 600~1600 RPM ±10% / 600~1400 RPM ±10%         |
|                   | Bearing         | Hydraulic Bearing                             |
|                   | Air Flow        | 29.46~69.63 CFM / 28.05~56.53 CFM             |
|                   | Air Flow        | 50.05~118.30 m³/h / 47.66~96.04 m³/h          |
|                   | Static Pressure | 0.36~1.39 mmH2O / 0.47~1.12 mmH2O             |
|                   | Noise           | 25 dBA (Max) / 23.5 dBA (Max)                 |
|                   | Rated Voltage   | 12V                                           |
|                   | Rated Current   | 0.19A / 0.16A                                 |
|                   | MTTF            | ≥ 40,000 hrs                                  |
|                   | Connector       | 4 Pin PWM                                     |
|                   | Thermal Grease  |                                               |
| TDP               |                 | 250W                                          |

## Logistic information

|                       |                    |               |
|-----------------------|--------------------|---------------|
| Barcode               | EAN                | 4713157729330 |
|                       | UPC                | 819315029336  |
| Box Dimension         | 155 x 133 x 205 mm |               |
| Gross Weight / Unit   | 0.93 kg            |               |
| Carton Dimension      | 485 x 413 x 455 mm |               |
| Q'ty / Carton         | 18 pcs             |               |
| Gross Weight / Carton | 17 kg              |               |